

**PDFN3.3X3.3-8 N Channel Enhancement 沟道增强型  
MOS Field Effect Transistor 场效应管**



**■ Features 特点**

Low on-resistance 低导通电阻  
 $R_{DS(ON)}=6.5m\Omega(\text{Type})@V_{GS}=10V$   
 $R_{DS(ON)}=8.7m\Omega(\text{Type})@V_{GS}=4.5V$

**■ Applications 应用**

Load Switch 负载开关  
 Uninterruptible power supply 不间断电源  
 High current load applications 高电流负载应用  
 Hard switched and high frequency circuits 硬开关和高频电路

**■ Internal Schematic Diagram 内部结构**

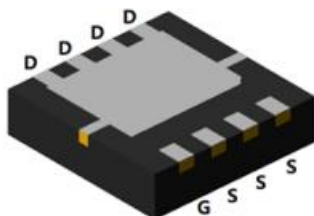

**■ Absolute Maximum Ratings 最大额定值**

Characteristic 特性参数	Symbol 符号	Rat 额定值	Unit 单位
Drain-Source Voltage 漏极-源极电压	$BV_{DSS}$	40	V
Gate- Source Voltage 栅极-源极电压	$V_{GS}$	$\pm 20$	V
Drain Current (continuous)漏极电流-连续	$I_D$ (at $T_C = 25^\circ C$ at $T_C = 100^\circ C$ )	35 22	A
Drain Current (pulsed)漏极电流-脉冲	$I_{DM}$	150	A
Total Device Dissipation 总耗散功率	$P_{TOT}$ (at $T_A = 25^\circ C$ at $T_C = 25^\circ C$ )	4.1 40	W
Avalanche Energy(Single Pulse)雪崩能量	EAS	120	mJ
Thermal Resistance Junction-Case 结壳热阻	$R_{\theta JC}$	3.1	$^\circ C/W$
Junction/Storage Temperature 结温/储存温度	$T_J, T_{stg}$	-55~150	$^\circ C$

■ **Electrical Characteristics 电特性**

( $T_A=25^{\circ}\text{C}$  unless otherwise noted 如无特殊说明, 温度为  $25^{\circ}\text{C}$ )

Characteristic 特性参数	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位
Drain-Source Breakdown Voltage 漏极-源极击穿电压( $I_D=250\mu\text{A}, V_{GS}=0\text{V}$ )	$BV_{DSS}$	40	—	—	V
Gate Threshold Voltage 栅极开启电压( $I_D=250\mu\text{A}, V_{GS}=V_{DS}$ )	$V_{GS(th)}$	1.0	1.5	2.5	V
Zero Gate Voltage Drain Current 零栅压漏极电流( $V_{GS}=0\text{V}, V_{DS}=40\text{V}$ )	$I_{DSS}$	—	—	1	$\mu\text{A}$
Gate Body Leakage 栅极漏电流( $V_{GS}=\pm 20\text{V}, V_{DS}=0\text{V}$ )	$I_{GSS}$	—	—	$\pm 100$	nA
Static Drain-Source On-State Resistance 静态漏源导通电阻( $I_D=20\text{A}, V_{GS}=10\text{V}$ ) ( $I_D=10\text{A}, V_{GS}=4.5\text{V}$ )	$R_{DS(ON)}$	—	6.5 8.7	8 13	$\text{m}\Omega$
Diode Forward Voltage Drop 内附二极管正向压降( $I_{SD}=20\text{A}, V_{GS}=0\text{V}$ )	$V_{SD}$	—	0.7	1.2	V
Input Capacitance 输入电容 ( $V_{GS}=0\text{V}, V_{DS}=20\text{V}, f=1\text{MHz}$ )	$C_{ISS}$	—	1860	—	pF
Common Source Output Capacitance 共源输出电容( $V_{GS}=0\text{V}, V_{DS}=20\text{V}, f=1\text{MHz}$ )	$C_{OSS}$	—	256	—	pF
Reverse Transfer Capacitance 反馈电容 ( $V_{GS}=0\text{V}, V_{DS}=20\text{V}, f=1\text{MHz}$ )	$C_{RSS}$	—	205	—	pF
Total Gate Charge 栅极电荷密度 ( $V_{DS}=20\text{V}, I_D=20\text{A}, V_{GS}=10\text{V}$ )	$Q_g$	—	48	—	nC
Gate Source Charge 栅源电荷密度 ( $V_{DS}=20\text{V}, I_D=20\text{A}, V_{GS}=10\text{V}$ )	$Q_{gs}$	—	8	—	nC
Gate Drain Charge 栅漏电荷密度 ( $V_{DS}=20\text{V}, I_D=20\text{A}, V_{GS}=10\text{V}$ )	$Q_{gd}$	—	12	—	nC
Turn-ON Delay Time 开启延迟时间 ( $V_{DS}=20\text{V}, I_D=2\text{A}, R_{GEN}=3\Omega, V_{GS}=10\text{V}$ )	$t_{d(on)}$	—	10	—	ns
Turn-ON Rise Time 开启上升时间 ( $V_{DS}=20\text{V}, I_D=2\text{A}, R_{GEN}=3\Omega, V_{GS}=10\text{V}$ )	$t_r$	—	21	—	ns
Turn-OFF Delay Time 关断延迟时间 ( $V_{DS}=20\text{V}, I_D=2\text{A}, R_{GEN}=3\Omega, V_{GS}=10\text{V}$ )	$t_{d(off)}$	—	36	—	ns
Turn-OFF Fall Time 关断下降时间 ( $V_{DS}=20\text{V}, I_D=2\text{A}, R_{GEN}=3\Omega, V_{GS}=10\text{V}$ )	$t_f$	—	25	—	ns

■ Typical Characteristic Curve 典型特性曲线

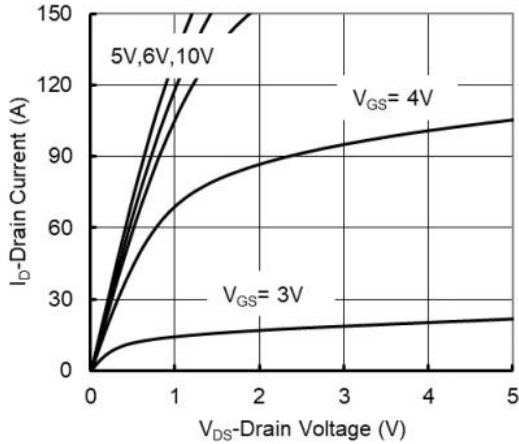


Figure 1: Output Characteristics

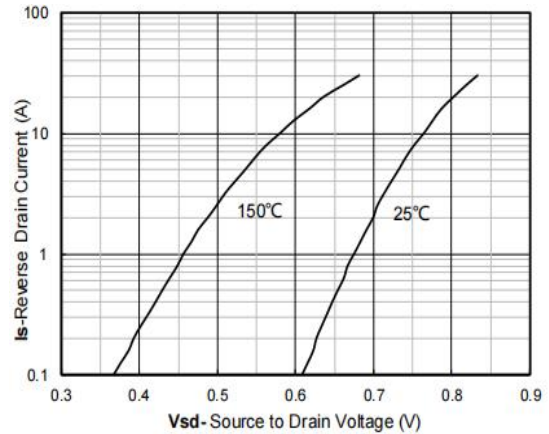


Figure 2: Diode Forward Characteristics

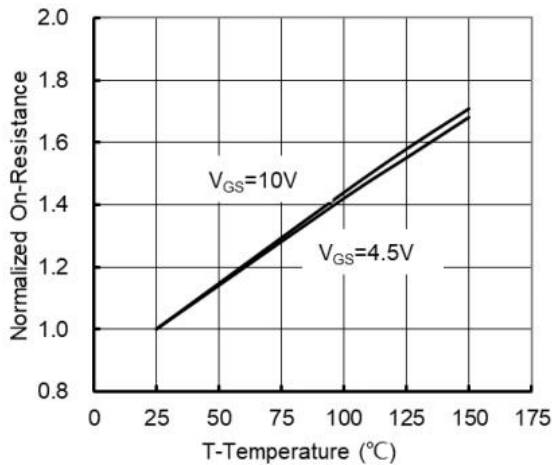


Figure 3: On-Resistance vs.  $T_j$

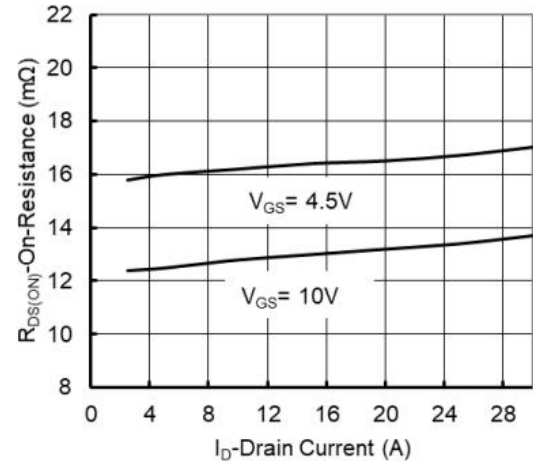


Figure 4: On-Resistance vs. Drain Current

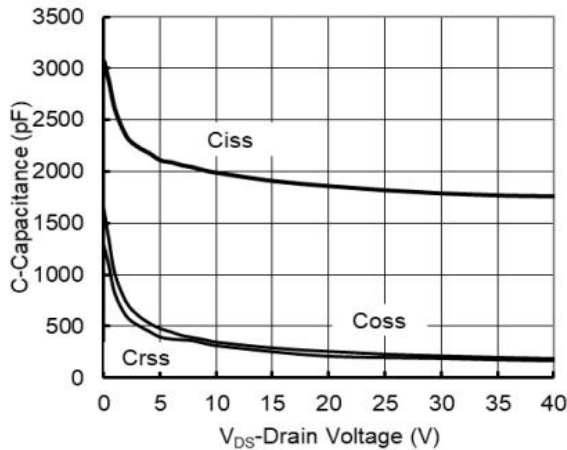


Figure 5: Capacitance Characteristics

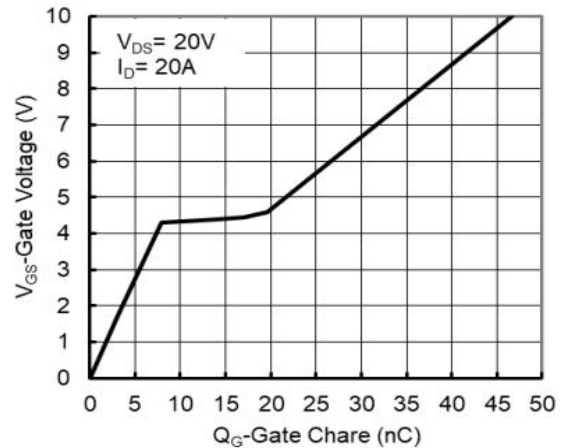


Figure 6: Gate-Charge Characteristics

■ Typical Characteristic Curve 典型特性曲线

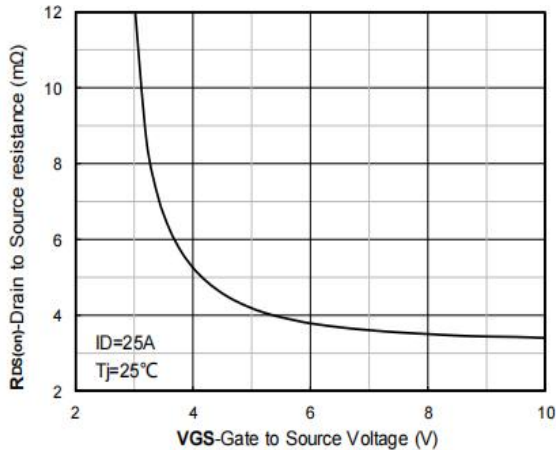


Figure 7: Drain Current vs.  $V_{GS}$

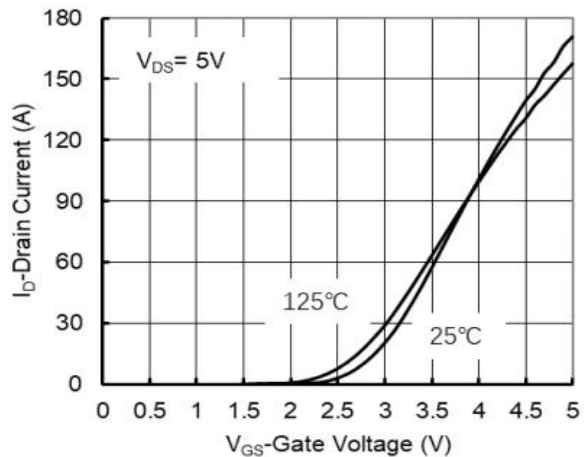


Figure 8: Transfer Characteristics

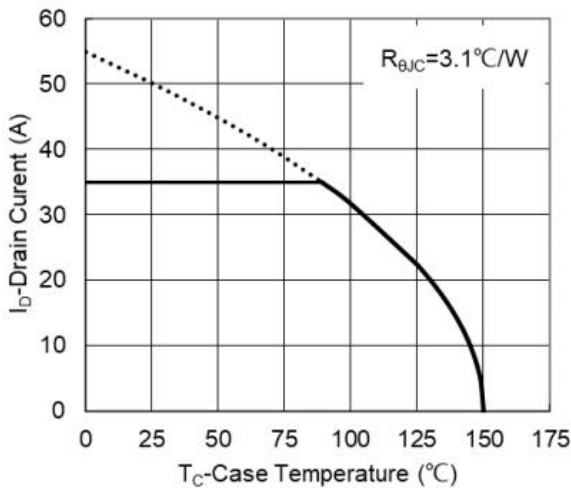


Figure 9: Drain Current Characteristics

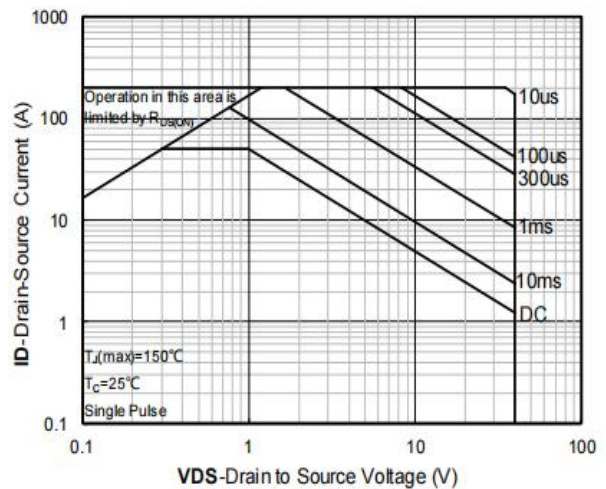


Figure 10: Safe Operating Area



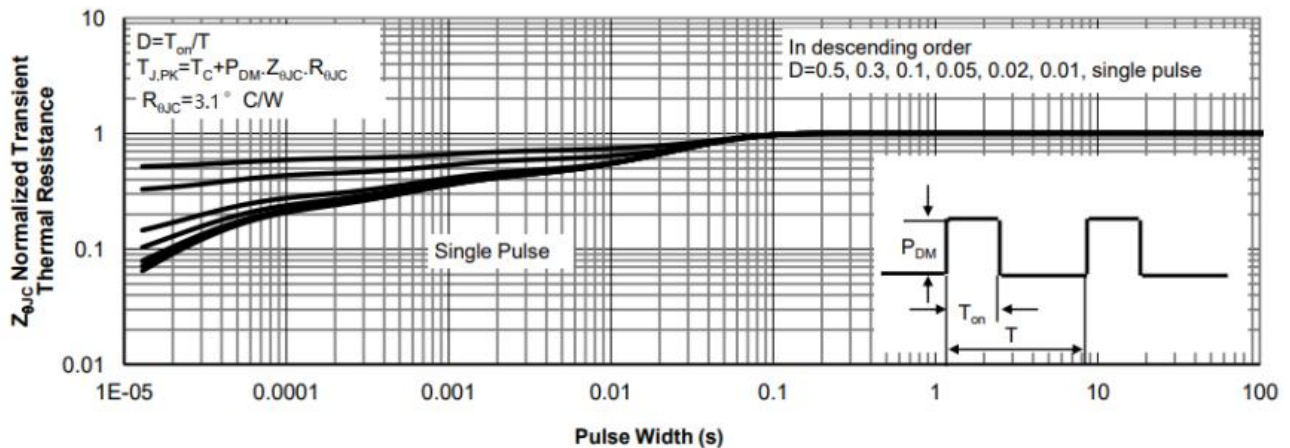


Figure 11: Transient Thermal Response Curve


■ Dimension 外形封装尺寸

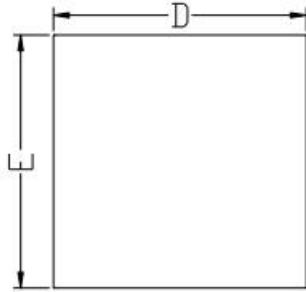

Top View  
正面视图

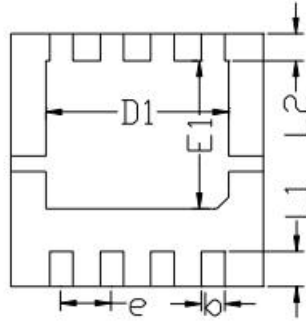

Bottom View  
背面视图

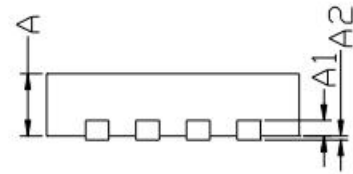

Side View  
侧面视图

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	3.15	3.25	3.35
E	3.15	3.25	3.35
A	0.70	0.80	0.90
A1	0.20 BSC		
A2			0.10
D1	2.20	2.35	2.50
E1	1.80	1.90	2.00
L1	0.35	0.45	0.55
L2	0.35 BSC		
b	0.20	0.30	0.40
e	0.65 BSC		