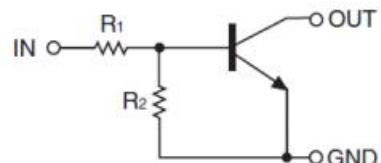
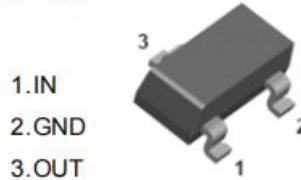


**SOT-23 Digital Transistor 数字晶体管****■ Features 特点**

NPN With Bias Resistor Network  
带偏置电阻

**■ Absolute Maximum Ratings 最大额定值****SOT-23**

Characteristic 特性参数	Symbol 符号	Rating 额定值	Unit 单位
Supply Voltage 电源电压	V <sub>CC</sub>	50	V
Input Voltage 输入电压	V <sub>IN</sub>	-6~+40	V
Output Current 输出电流	I <sub>O</sub>	100	mA
Power dissipation 耗散功率	P <sub>C</sub> (T <sub>a</sub> =25°C)	200	mW
Thermal Resistance Junction-Ambient 热阻	R <sub>θJA</sub>	625	°C/W
Junction and Storage Temperature 结温和储藏温度	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150°C	

**■ Device Marking 产品打标**

DTC114Y=64

**■ Electrical Characteristics 电特性**

(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Min 最小值	Type 典型值	Max 最大值	Unit 单位
Input Voltage 输入电压 (V <sub>CC</sub> =5V, I <sub>O</sub> =100μA)	V <sub>I(off)</sub>	—	—	0.3	V
Input Voltage 输入电压 (V <sub>O</sub> =0.3V, I <sub>O</sub> =1mA)	V <sub>I(on)</sub>	1.4	—	—	V
Output Voltage 输出电压 (I <sub>O</sub> /I <sub>I</sub> =5mA/0.25mA)	V <sub>O(on)</sub>	—	0.1	0.3	V
Input Current 输入电流 (V <sub>I</sub> =5V)	I <sub>I</sub>	—	—	0.88	mA
Output Current 输出电流 (V <sub>CC</sub> =50V, V <sub>I</sub> =0)	I <sub>O(off)</sub>	—	—	0.5	μA
DC Current Gain 直流电流增益 (V <sub>O</sub> =5V, I <sub>O</sub> =5mA)	G <sub>I</sub>	68	—	—	
Input Resistor 输入电阻	R <sub>1</sub>	7	10	13	KΩ
Resistor Ratio 电阻比率	R <sub>2</sub> /R <sub>1</sub>	3.7	4.7	5.7	
Transition frequency 特征频率 (V <sub>O</sub> =10V, I <sub>O</sub> =5mA)	f <sub>T</sub>	—	250	—	MHz

## ■Typical Characteristic Curve 典型特性曲线

Fig.1 Input voltage vs. output current (ON characteristics)

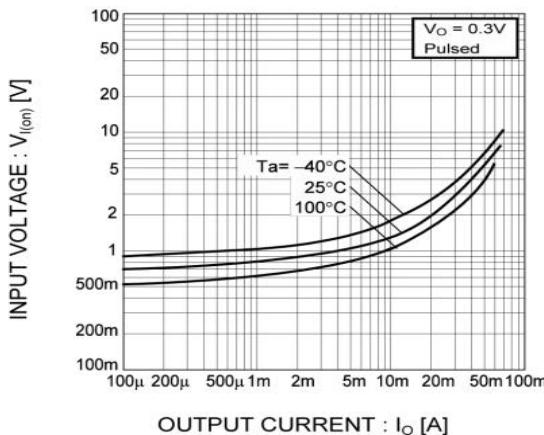


Fig.3 Output current vs. output voltage

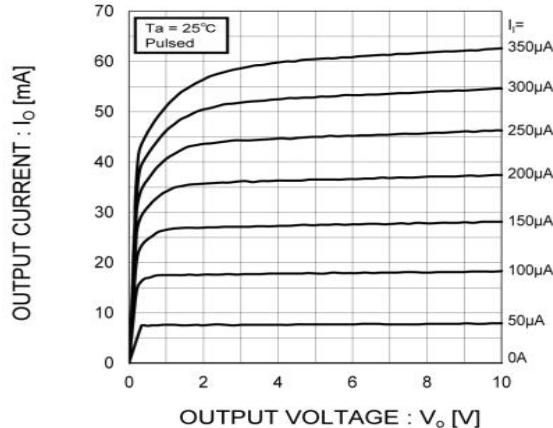


Fig.5 Output voltage vs. output current

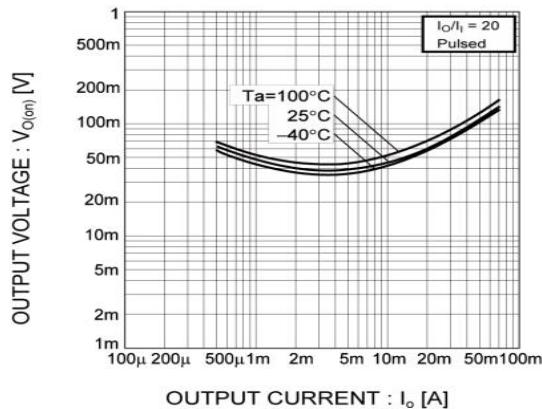


Fig.2 Output current vs. input voltage (OFF characteristics)



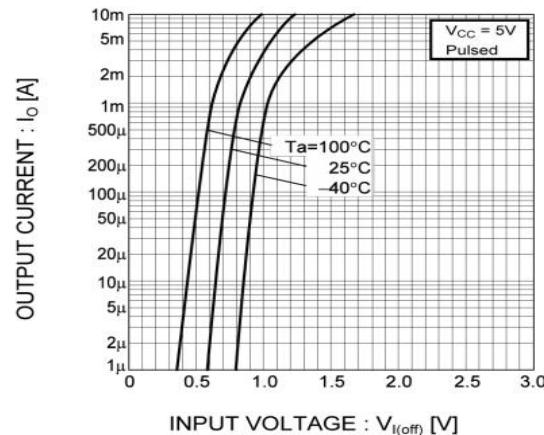


Fig.4 DC current gain vs. output current

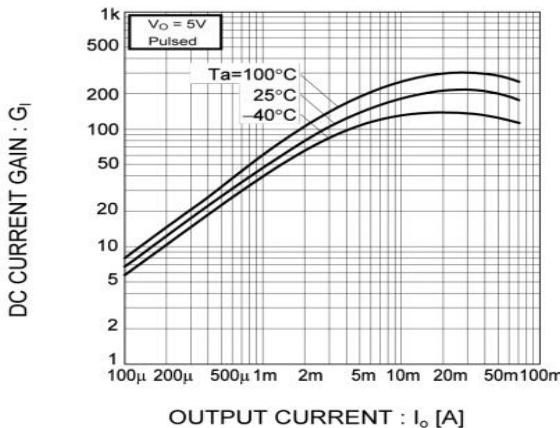

## ■ Dimension 外形封装尺寸

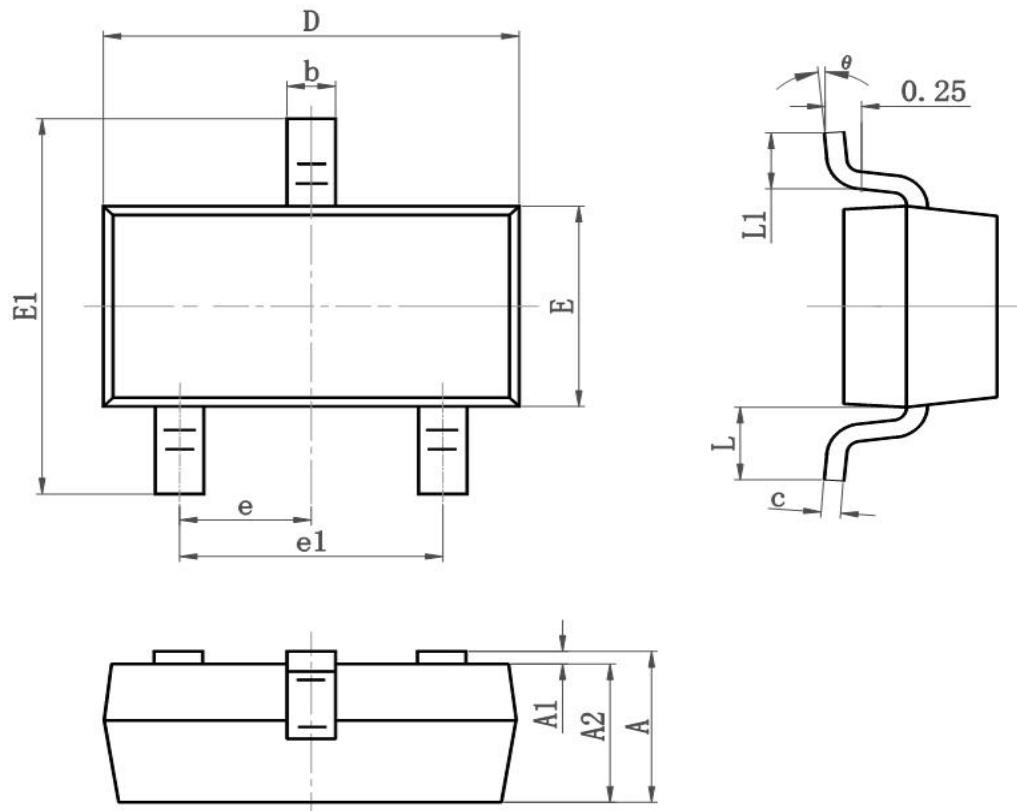

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.050	0.055
E1	2.250	2.550	0.089	0.100
e	0.900	1.00	0.035	0.039
e1	1.800	2.000	0.071	0.079
L	0.500	0.600	0.020	0.024
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°