


## SOT-89-3L Bipolar Transistor 双极型三极管

### ■ Features 特点

**NPN High Voltage Switching 高压开关**

1. BASE  
2. COLLECTOR  
3. EMITTER



### ■ Absolute Maximum Ratings 最大额定值

Characteristic 特性参数	Symbol 符号	Rat 额定值	Unit 单位
Collector-Base Voltage 集电极基极电压	$V_{CBO}$	700	V
Collector-Emitter Voltage 集电极发射极电压	$V_{CEO}$	480	V
Emitter-Base Voltage 发射极基极电压	$V_{EBO}$	9	V
Collector Current 集电极电流	$I_C$	500	mA
Power dissipation 耗散功率	$P_C(T_a=25^\circ\text{C})$	500	mW
Thermal Resistance Junction-Ambient 热阻	$R_{\theta JA}$	250	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature 结温和储藏温度	$T_J, T_{stg}$	-55to+150 $^\circ\text{C}$	

### ■ Device Marking 产品打标


FS13003=H03F

■ **Electrical Characteristics** 电特性

( $T_A=25^\circ\text{C}$  unless otherwise noted 如无特殊说明, 温度为  $25^\circ\text{C}$ )

Characteristic 特性参数	Symbol 符号	Min 最小值	Type 典型值	Max 最大值	Unit 单位
Collector-Base Breakdown Voltage 集电极基极击穿电压( $I_C=100\mu\text{A}$ , $I_E=0$ )	$BV_{CBO}$	700	800	—	V
Collector-Emitter Breakdown Voltage 集电极发射极击穿电压( $I_C=1\text{mA}$ , $I_B=0$ )	$BV_{CEO}$	480	530	—	V
Emitter-Base Breakdown Voltage 发射极基极击穿电压( $I_E=100\mu\text{A}$ , $I_C=0$ )	$BV_{EBO}$	9	—	—	V
Collector-Base Leakage Current 集电极基极漏电流( $V_{CB}=670\text{V}$ , $I_E=0$ )	$I_{CBO}$	—	—	1	$\mu\text{A}$
Emitter-Base Leakage Current 发射极基极漏电流( $V_{EB}=9\text{V}$ , $I_C=0$ )	$I_{EBO}$	—	—	1	$\mu\text{A}$
DC Current Gain 直流电流增益( $V_{CE}=10\text{V}$ , $I_C=200\mu\text{A}$ )	$H_{FE(1)}$	5	—	—	
DC Current Gain 直流电流增益( $V_{CE}=10\text{V}$ , $I_C=20\text{mA}$ )	$H_{FE(2)}$	15	—	40	
DC Current Gain 直流电流增益( $V_{CE}=10\text{V}$ , $I_C=200\text{mA}$ )	$H_{FE(3)}$	10	—	—	
Collector-Emitter Saturation Voltage 集电极发射极饱和压降( $I_C=100\text{mA}$ , $I_B=20\text{mA}$ )	$V_{CE(sat)}$	—	—	0.5	V
Base-Emitter Saturation Voltage 基极发射极饱和压降( $I_C=100\text{mA}$ , $I_B=20\text{mA}$ )	$V_{BE(sat)}$	—	—	1.2	V
Transition Frequency 特征频率( $V_{CE}=10\text{V}$ , $I_C=20\text{mA}$ )	$f_T$	5	—	—	MHz
Fall Time 下降时间 ( $V_{CC}=45\text{V}$ , $I_C=50\text{mA}$ , $I_{B1}=-I_{B2}=5\text{mA}$ )	$t_f$	—	—	350	ns
Storage Time 贮存时间 ( $V_{CC}=45\text{V}$ , $I_C=50\text{mA}$ , $I_{B1}=-I_{B2}=5\text{mA}$ )	$t_s$	—	—	2	$\mu\text{s}$

■Dimension 外形封装尺寸

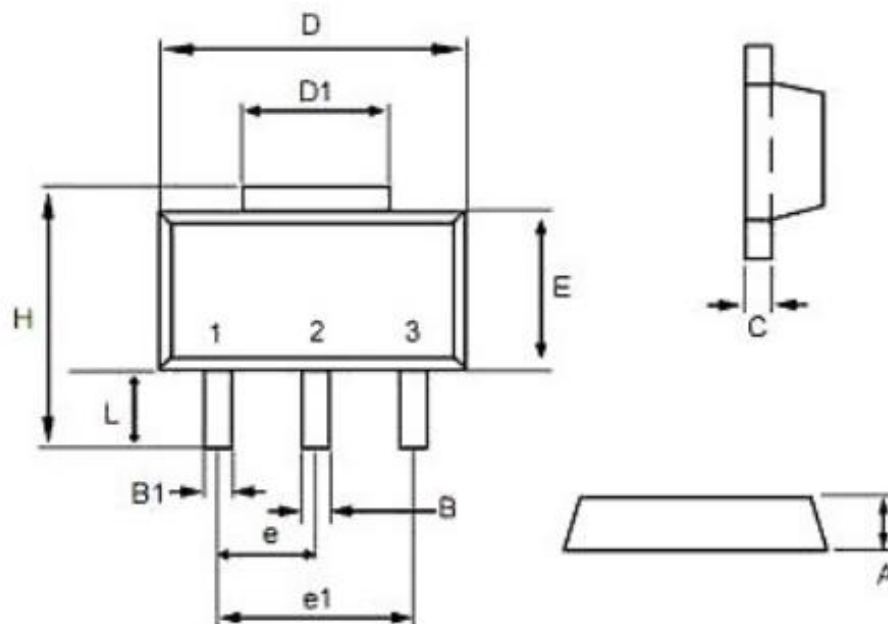

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.40	1.60	0.055	0.063
B	0.40	0.56	0.016	0.022
B1	0.35	0.48	0.014	0.019
C	0.35	0.44	0.014	0.017
D	4.40	4.60	0.173	0.181
D1	1.35	1.83	0.053	0.072
e	1.45	1.55	0.057	0.061
e1	2.95	3.05	0.116	0.120
E	2.29	2.60	0.090	0.102
H	3.75	4.25	0.148	0.167
L	0.80	1.20	0.031	0.047