


**SOT-23-6L 30/-30V N+P Channel Enhancement 双沟道增强型
MOS Field Effect Transistor 场效应管**

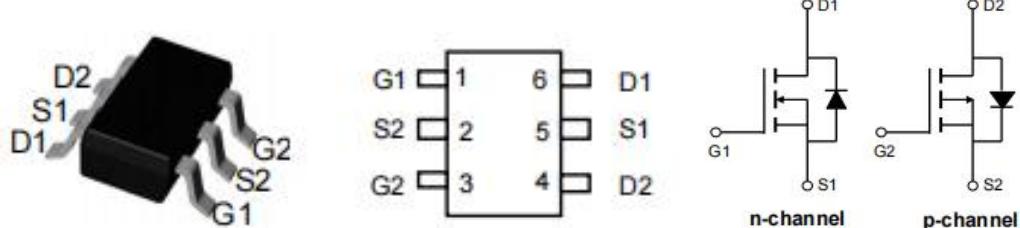

■Absolute Maximum Ratings 最大额定值

Characteristic 特性参数	Symbol 符号	Rating 额定值	Unit 单位
Drain-Source Voltage 漏极-源极电压	BV_{DSS}	30/-30	V
Gate- Source Voltage 栅极-源极电压	V_{GS}	± 20	V
Drain Current (continuous)漏极电流-连续	I_D (at $T_A = 25^\circ C$)	3.6/-3	A
Drain Current (pulsed)漏极电流-脉冲	I_{DM}	25/-20	A
Total Device Dissipation 总耗散功率	P_D (at $T_A = 25^\circ C$)	1000/1100	mW
Thermal Resistance Junction-Ambient 热阻	$R_{\Theta JA}$	125/113	$^\circ C/W$
Junction/Storage Temperature 结温/储存温度	T_J, T_{stg}	-55~150	$^\circ C$

■Device Marking 产品字标

FS6602=6602

■ Electrical Characteristics 电特性(N)(T_A=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位
Drain-Source Breakdown Voltage 漏极-源极击穿电压(I _D =250uA, V _{GS} =0V)	BV _{DSS}	30	—	—	V
Gate Threshold Voltage 栅极开启电压(I _D =250uA, V _{GS} = V _{DS})	V _{GS(th)}	1	1.5	2.2	V
Zero Gate Voltage Drain Current 零栅压漏极电流(V _{GS} =0V, V _{DS} = 30V)	I _{DSS}	—	—	1	uA
Gate Body Leakage 栅极漏电流(V _{GS} =±20V, V _{DS} =0V)	I _{GSS}	—	—	±100	nA
Static Drain-Source On-State Resistance 静态漏源导通电阻(I _D =3.6A, V _{GS} =10V) (I _D =3A, V _{GS} =4.5V)	R _{DSS(ON)}	—	40 50	50 70	mΩ
Diode Forward Voltage Drop 内附二极管正向压降(I _{SD} =3.6A, V _{GS} =0V)	V _{SD}	—	—	1.2	V
Input Capacitance 输入电容 (V _{GS} =0V, V _{DS} =10V,f=1MHz)	C _{ISS}	—	314	—	pF
Common Source Output Capacitance 共源输出电容(V _{GS} =0V, V _{DS} =10V,f=1MHz)	C _{OSS}	—	59	—	pF
Reverse Transfer Capacitance 反馈电容(V _{GS} =0V, V _{DS} =10V,f=1MHz)	C _{RSS}	—	48	—	pF
Total Gate Charge 棚极电荷密度 (V _{DS} =15V, I _D =3.6A, V _{GS} =10V)	Q _g	—	6	—	nC
Gate Source Charge 棚源电荷密度 (V _{DS} =15V, I _D =3.6A, V _{GS} =10V)	Q _{gs}	—	1.6	—	nC
Gate Drain Charge 棚漏电荷密度 (V _{DS} =15V, I _D =3.6A, V _{GS} =10V)	Q _{gd}	—	1.6	—	nC
Turn-ON Delay Time 开启延迟时间 (V _{DS} =15V I _D =3.6A, R _{GEN} =3 Ω, V _{GS} =10V)	t _{d(on)}	—	3.8	—	ns
Turn-ON Rise Time 开启上升时间 (V _{DS} =15V I _D =3.6A, R _{GEN} =3 Ω, V _{GS} =10V)	t _r	—	23	—	ns
Turn-OFF Delay Time 关断延迟时间 (V _{DS} =15V I _D =3.6A, R _{GEN} =3 Ω, V _{GS} =10V)	t _{d(off)}	—	8	—	ns
Turn-OFF Fall Time 关断下降时间 (V _{DS} =15V I _D =3.6A, R _{GEN} =3 Ω, V _{GS} =10V)	t _f	—	18	—	ns

■ Electrical Characteristics 电特性(P)(T_A=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位
Drain-Source Breakdown Voltage 漏极-源极击穿电压(I _D = -250uA, V _{GS} =0V)	BV _{DSS}	-30	—	—	V
Gate Threshold Voltage 栅极开启电压(I _D = -250uA, V _{GS} = V _{DS})	V _{GS(th)}	-1	-1.5	-2.4	V
Zero Gate Voltage Drain Current 零栅压漏极电流(V _{GS} =0V, V _{DS} = -30V)	I _{DSS}	—	—	1	uA
Gate Body Leakage 栅极漏电流(V _{GS} =±20V, V _{DS} =0V)	I _{GSS}	—	—	±100	nA
Static Drain-Source On-State Resistance 静态漏源导通电阻(I _D = -3A, V _{GS} = -10V) (I _D = -2A, V _{GS} = -4.5V)	R _{DSS(ON)}	—	56 79	75 109	mΩ
Diode Forward Voltage Drop 内附二极管正向压降(I _{SD} = -3A, V _{GS} =0V)	V _{SD}	—	—	-1.2	V
Input Capacitance 输入电容 (V _{GS} =0V, V _{DS} = -10V,f=1MHz)	C _{ISS}	—	365	—	pF
Common Source Output Capacitance 共源输出电容(V _{GS} =0V, V _{DS} = -10V,f=1MHz)	C _{OSS}	—	59	—	pF
Reverse Transfer Capacitance 反馈电容(V _{GS} =0V, V _{DS} = -10V,f=1MHz)	C _{RSS}	—	45	—	pF
Total Gate Charge 棚极电荷密度 (V _{DS} = -15V, I _D = -3A, V _{GS} = -10V)	Q _g	—	8	—	nC
Gate Source Charge 棚源电荷密度 (V _{DS} = -15V, I _D = -3A, V _{GS} = -10V)	Q _{gs}	—	2	—	nC
Gate Drain Charge 棚漏电荷密度 (V _{DS} = -15V, I _D = -3A, V _{GS} = -10V)	Q _{gd}	—	1	—	nC
Turn-ON Delay Time 开启延迟时间 (V _{DS} = -15V I _D = -1A, R _{GEN} =2.5 Ω ,V _{GS} = -10V)	t _{d(on)}	—	3	—	ns
Turn-ON Rise Time 开启上升时间 (V _{DS} = -15V I _D = -1A, R _{GEN} =2.5 Ω ,V _{GS} = -10V)	t _r	—	18	—	ns
Turn-OFF Delay Time 关断延迟时间 (V _{DS} = -15V I _D = -1A, R _{GEN} =2.5 Ω ,V _{GS} = -10V)	t _{d(off)}	—	18	—	ns
Turn-OFF Fall Time 关断下降时间 (V _{DS} = -15V I _D = -1A, R _{GEN} =2.5 Ω ,V _{GS} = -10V)	t _f	—	23	—	ns

■Typical Characteristic Curve 典型特性曲线(N)

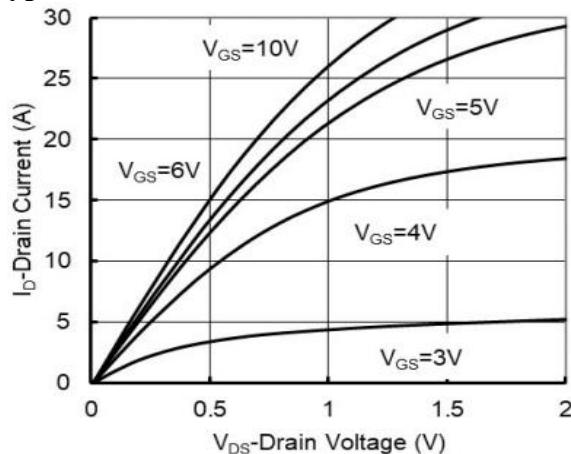


Figure 1: Output Characteristics

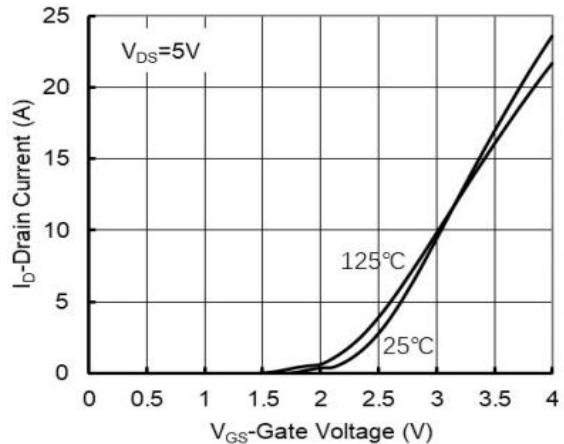


Figure 2: Transfer Characteristics

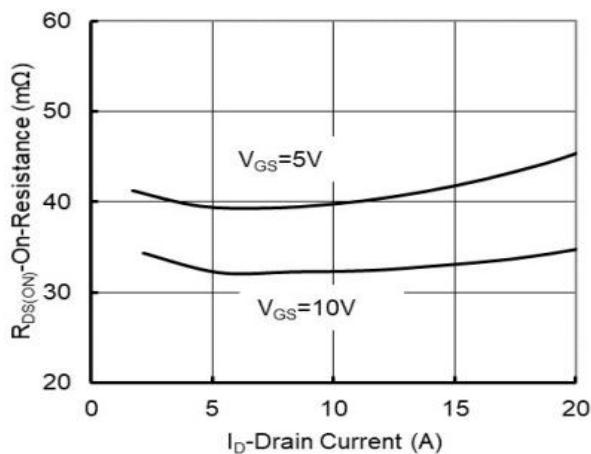


Figure 3: On-Resistance vs. Drain Current

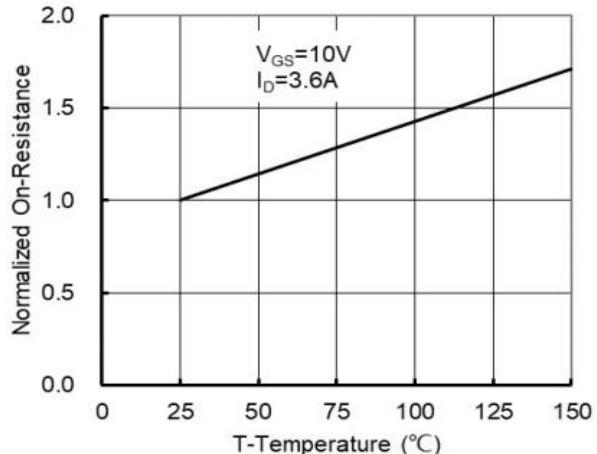


Figure 4: On-Resistance vs. Temperature

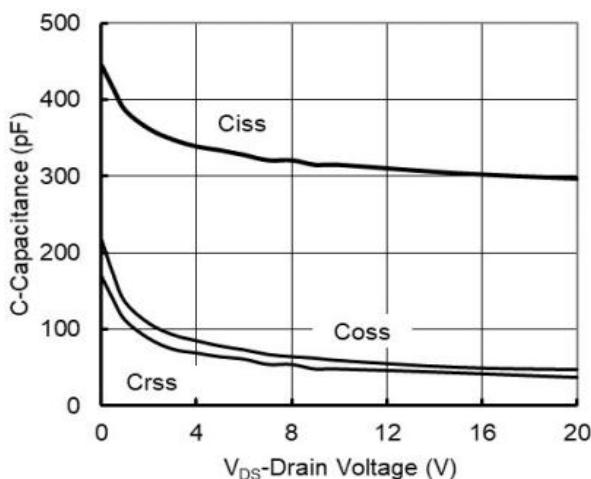


Figure 5: Capacitance Characteristics

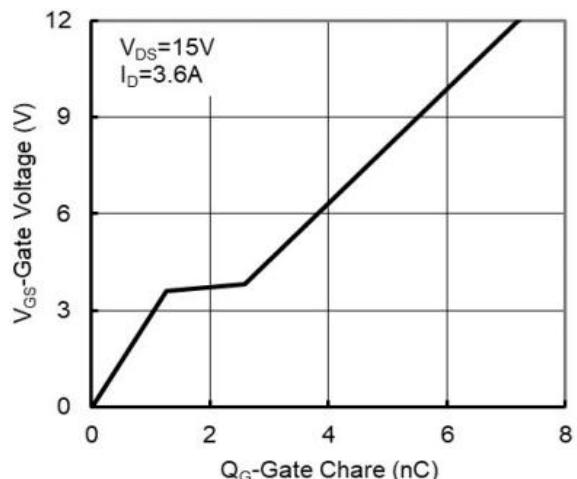


Figure 6: Gate-Charge Characteristics

■Typical Characteristic Curve 典型特性曲线(N)

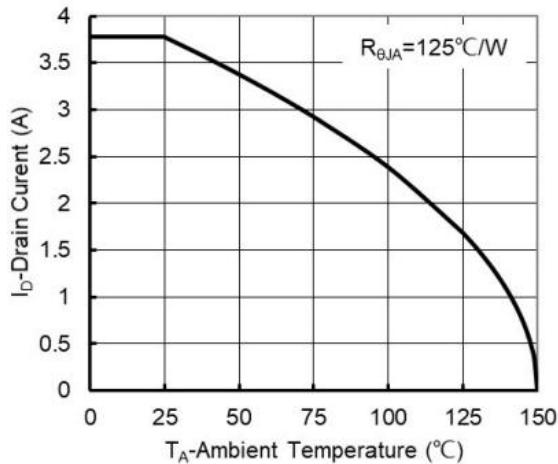


Figure 7: Drain Current vs. Temperature

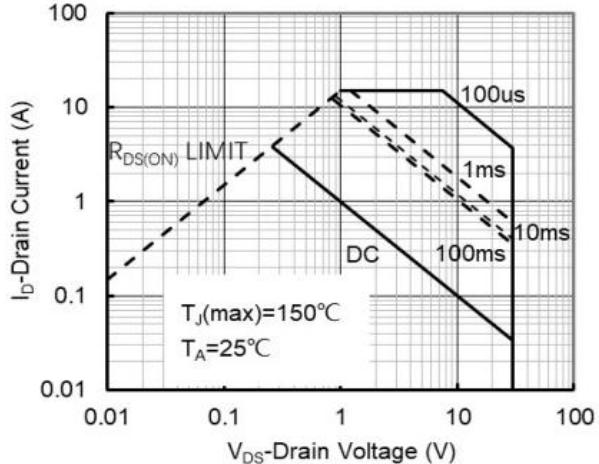


Figure 8: Safe Operating Area

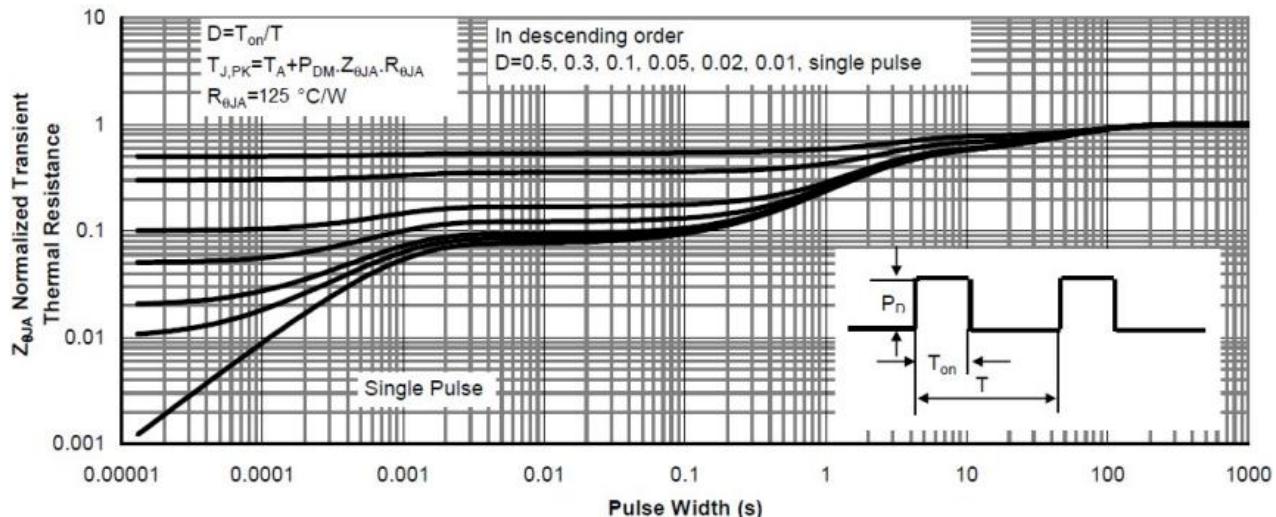


Figure 9: Transient Thermal Response Curve

■Typical Characteristic Curve 典型特性曲线(P)

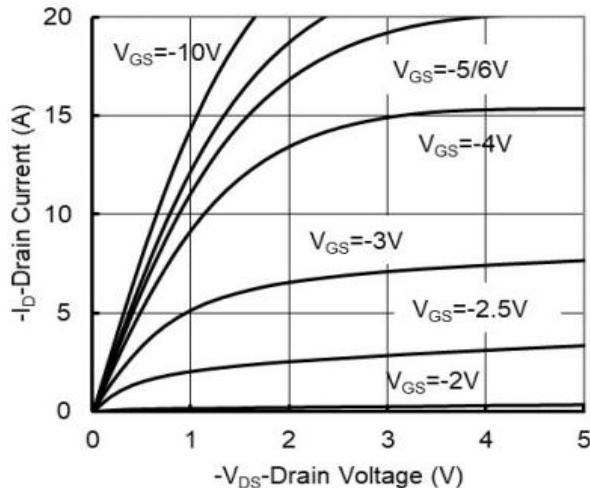


Figure 1: Output Characteristics

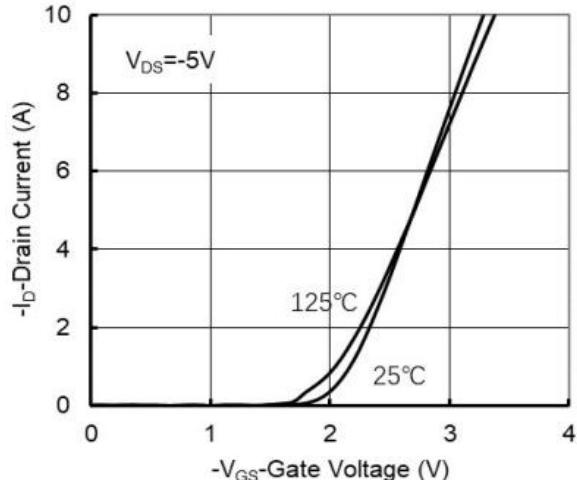


Figure 2: Transfer Characteristics

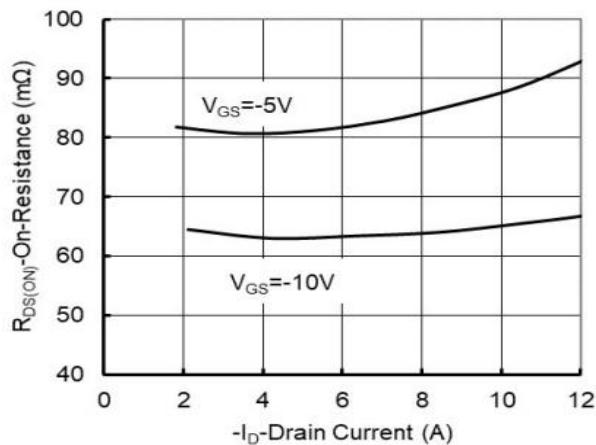


Figure 3: On-Resistance vs. Drain Current

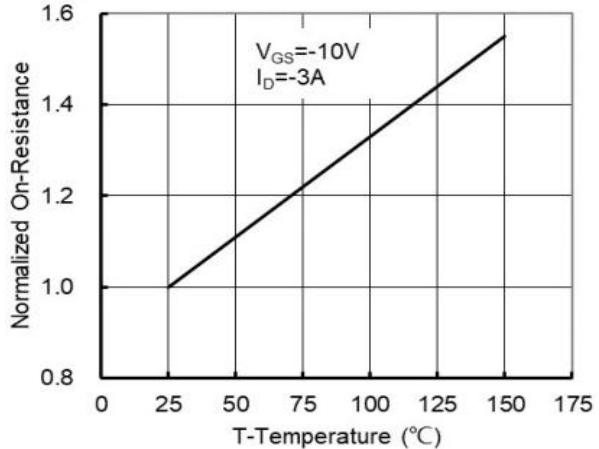


Figure 4: On-Resistance vs. Temperature

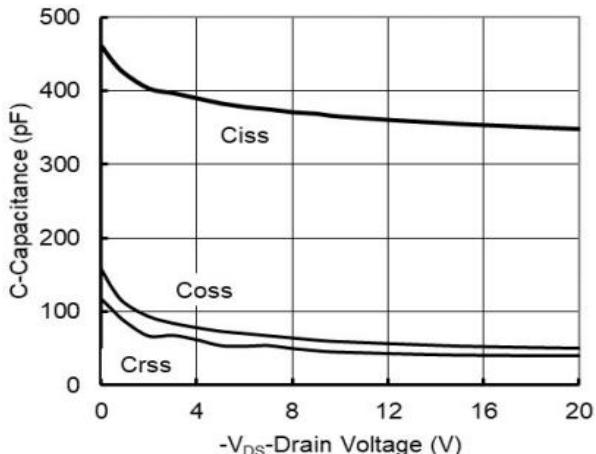


Figure 5: Capacitance Characteristics

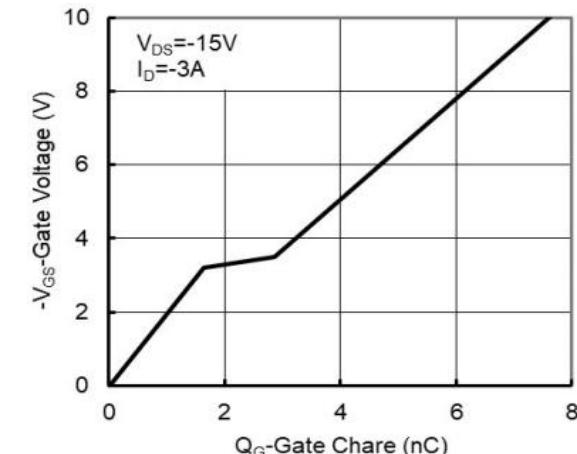


Figure 6: Gate-Charge Characteristics

■Typical Characteristic Curve 典型特性曲线(P)

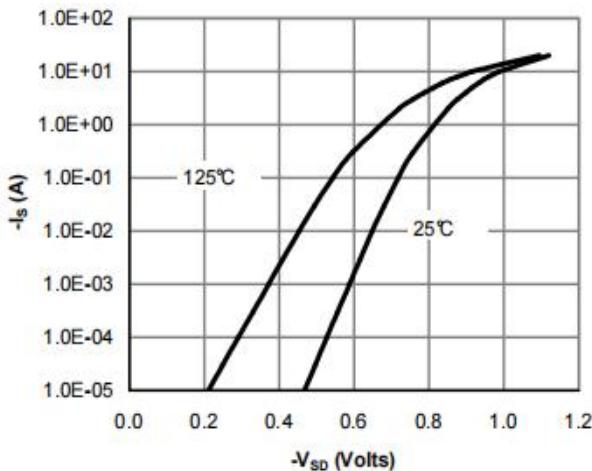


Figure 7: Diode Characteristics

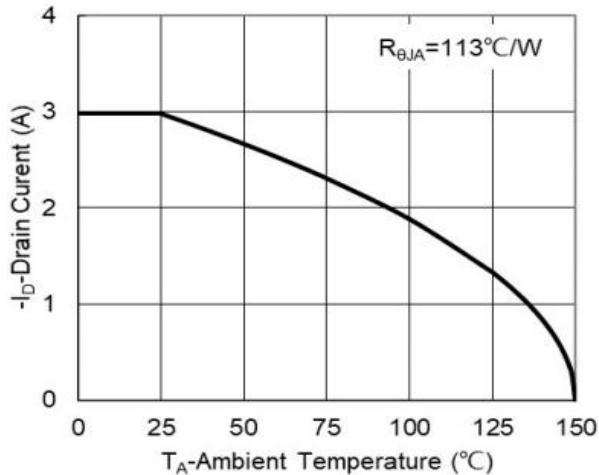


Figure 8: Drain Current vs. Temperature

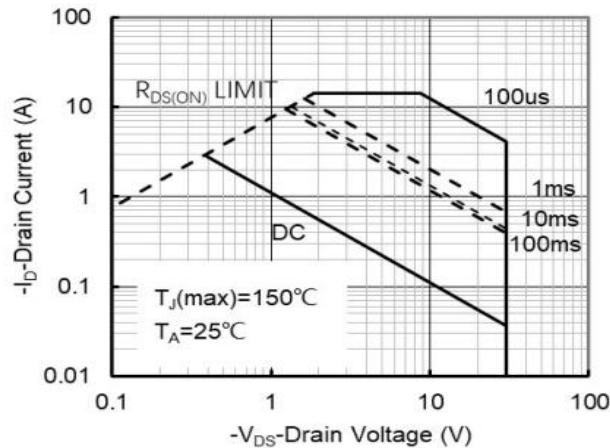


Figure 9: Safe Operating Area


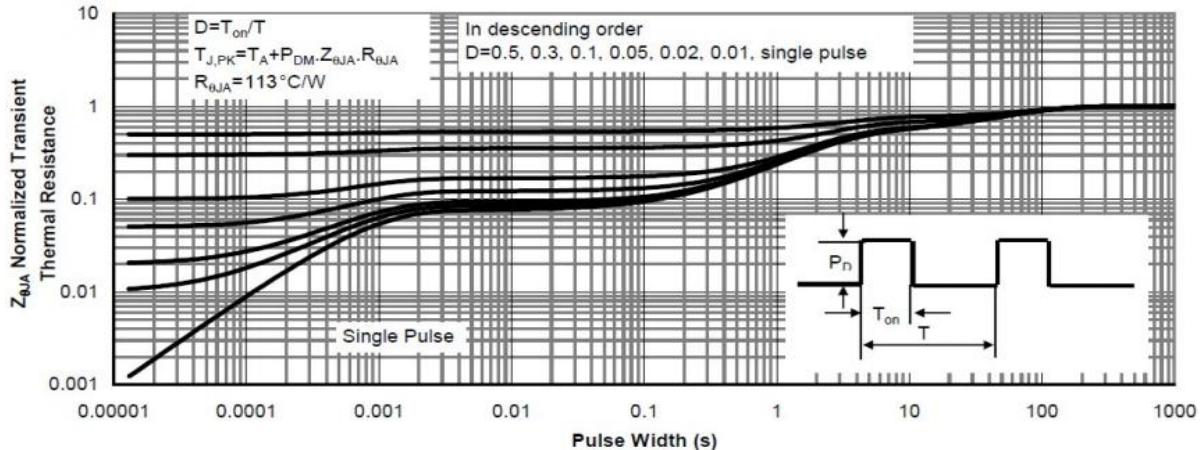


Figure 10: Transient Thermal Response Curve

■ Dimension 外形封装尺寸

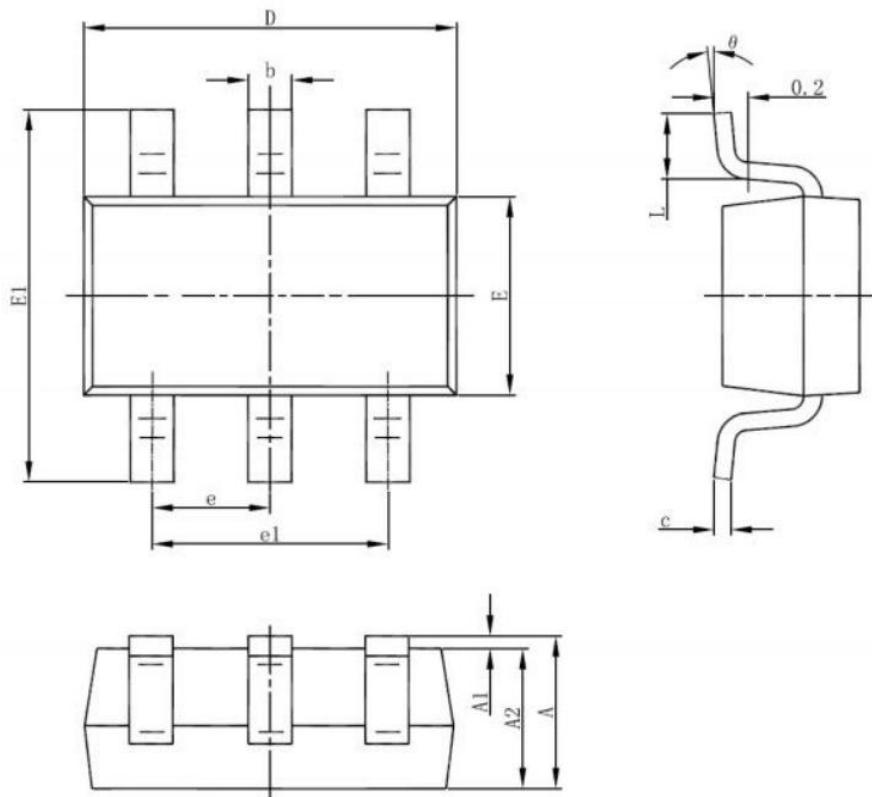

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.900	1.00	0.035	0.039
e1	1.800	2.000	0.071	0.079
L	0.450	0.650	0.018	0.026
L1	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°