


SOT-23 Bipolar Transistor 双极型三极管**■Features 特点****NPN High Frequency 高频****SOT-23**

1. BASE
-
2. Emitter
-
3. Collector

**■Absolute Maximum Ratings 最大额定值**

Characteristic 特性参数	Symbol 符号	Rating 额定值	Unit 单位
Collector-Base Voltage 集电极基极电压	V _{CBO}	20	V
Collector-Emitter Voltage 集电极发射极电压	V _{CEO}	12	V
Emitter-Base Voltage 发射极基极电压	V _{EBO}	3	V
Collector Current 集电极电流	I _C	100	mA
Power dissipation 耗散功率	P _C (T _a =25°C)	200	mW
Thermal Resistance Junction-Ambient 热阻	R _{θJA}	625	°C/W
Junction and Storage Temperature 结温和储藏温度	T _J , T _{stg}	-55 to +150°C	

■Device Marking 产品打标







H _{FE}	50-100	80-160	125-250
Mark	R23	R24	R25

■ Electrical Characteristics 电特性


(TA=25°C unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	Min 最小值	Type 典型值	Max 最大值	Unit 单位
Collector-Base Breakdown Voltage 集电极基极击穿电压 (Ic=100μA, Ie=0)	BV _{CBO}	20	—	—	V
Collector-Emitter Breakdown Voltage 集电极发射极击穿电压 (Ic=1mA, Ib=0)	BV _{CEO}	12	—	—	V
Emitter-Base Breakdown Voltage 发射极基极击穿电压 (Ie=100μA, Ic=0)	BV _{EBO}	3	—	—	V
Collector-Base Leakage Current 集电极基极漏电流 (V _{CB} =10V, Ie=0)	I _{CBO}	—	—	1	μA
Emitter-Base Leakage Current 发射极基极漏电流 (V _{EB} =1V, Ic=0)	I _{EBO}	—	—	1	μA
DC Current Gain 直流电流增益 (V _{CE} =10V, Ic=20mA)	H _{FE}	50	—	250	
Collector-Emitter Saturation Voltage 集电极发射极饱和压降 (Ic=50mA, Ib=5mA)	V _{CE(sat)}	—	—	0.3	V
Base-Emitter Saturation Voltage 基极发射极饱和压降 (Ic=50mA, Ib=5mA)	V _{BE(sat)}	—	—	1.15	V
Transition Frequency 特征频率 (V _{CE} =10V, Ic=20mA)	f _T	—	7000	—	MHz
Output Capacitance 输出电容 (V _{CB} =10V, Ie=0, f=1MHz)	C _{ob}	—	0.8	1	pF
Noise Figure 噪声系数 (V _{CE} =10V, Ic=7mA, f=1GHz)	NF	—	1.65	2	dB

■Typical Characteristic Curve 典型特性曲线

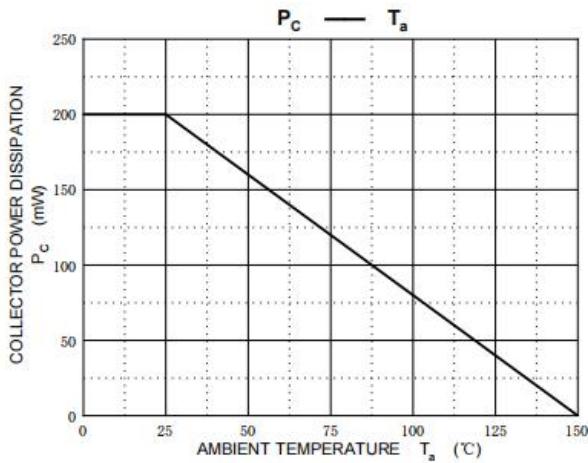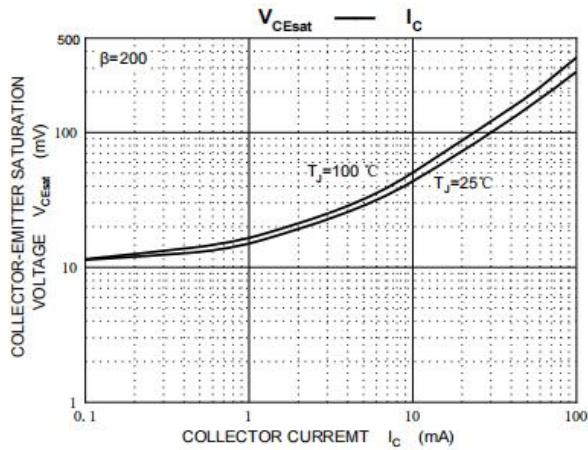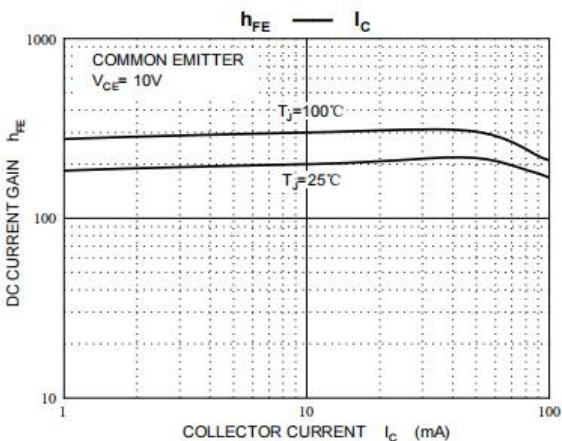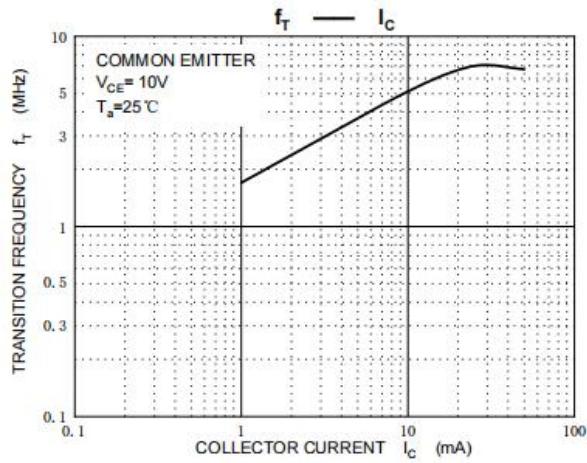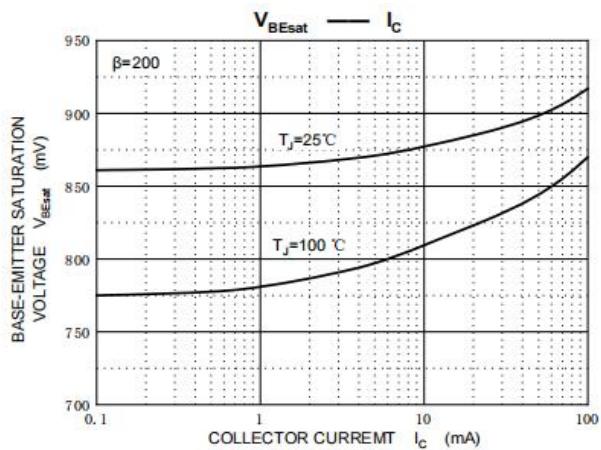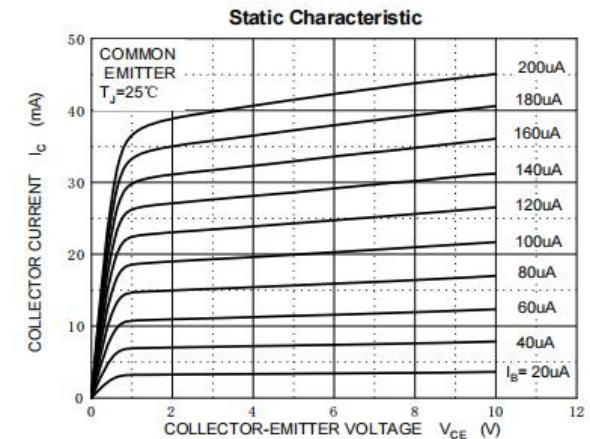

■ Dimension 外形封装尺寸

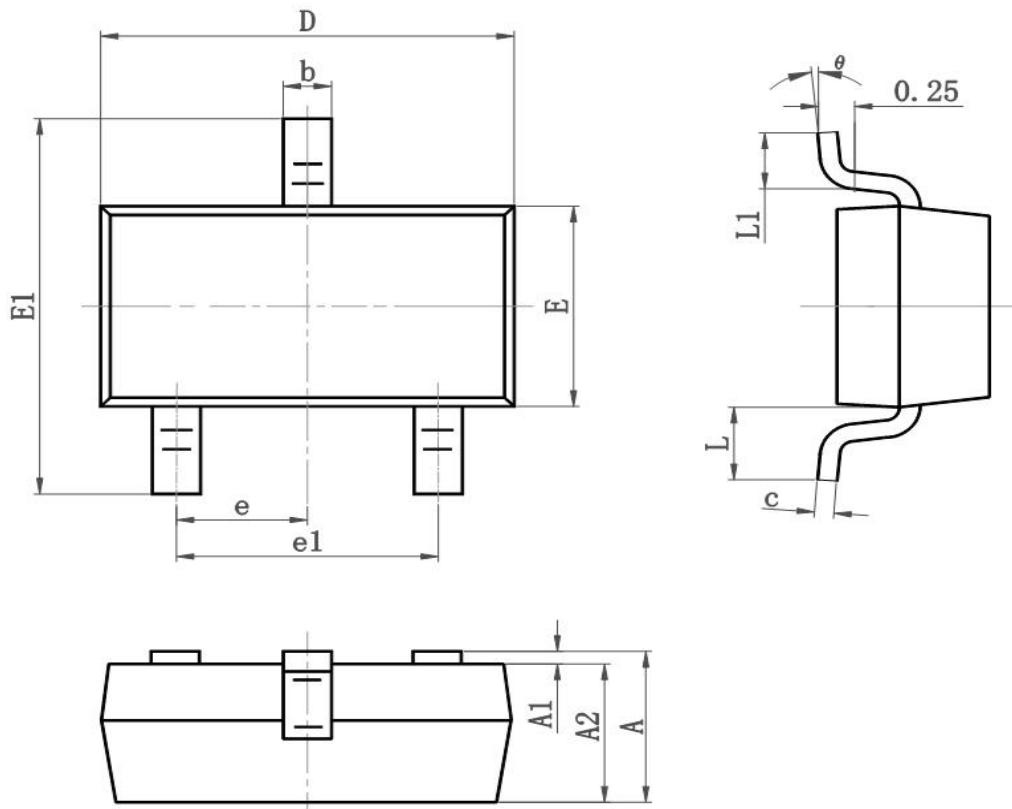

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.050	0.055
E1	2.250	2.550	0.089	0.100
e	0.900	1.00	0.035	0.039
e1	1.800	2.000	0.071	0.079
L	0.500	0.600	0.020	0.024
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°